

TI-35260

1 of 4

J. Garner

TiN/TaN (bottom electrode) Cladding:

118



PO 11^6

Cu (Gnd)

Cu (+ve)

TiN/TaN (TE) 11^2

106

SiC/SiN ES

106

TaO_xHfO_y 110

106

TiN/TaN (cladding, BE) 10^8

108

108

108

108

108

108

108

108

108

108

108

108

108

108

108

108

108

108

108

108

108

108

108

108

108

108

108

108

108

108

FIG. 1

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104

104




104

104

104

104

104

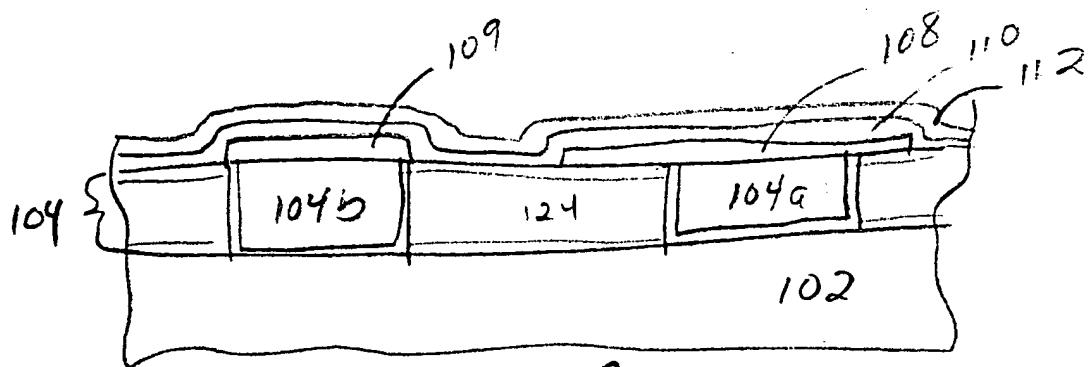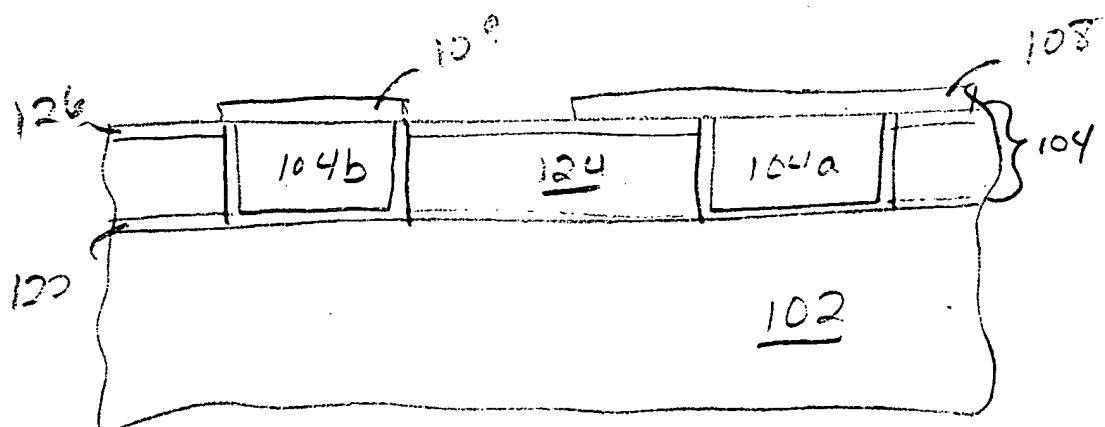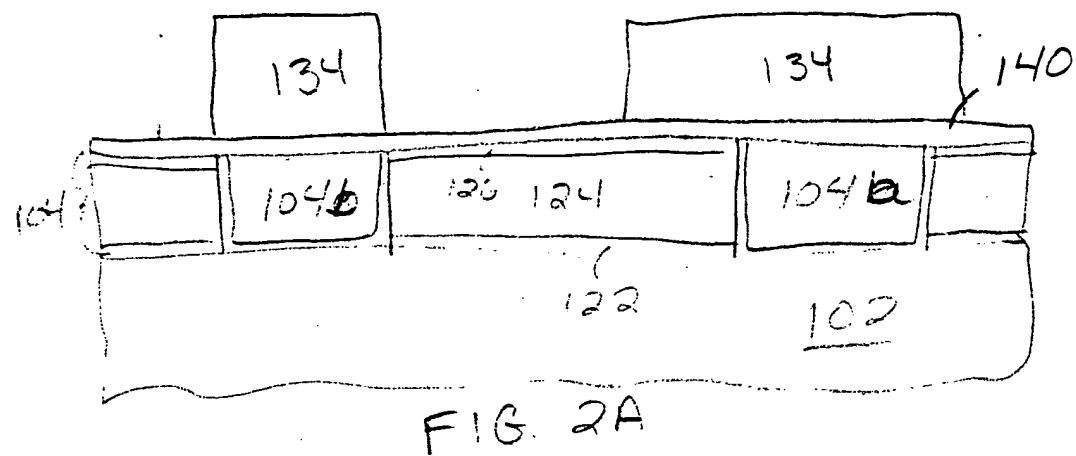

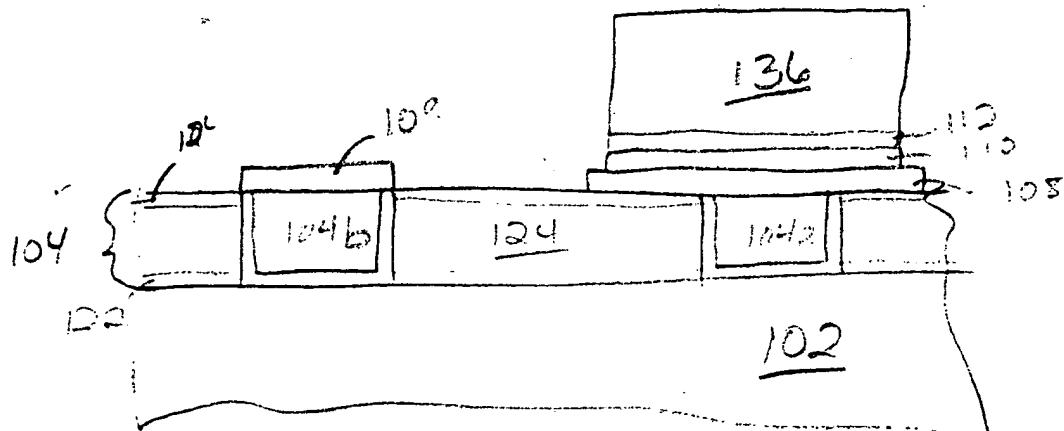


FIG. 2D

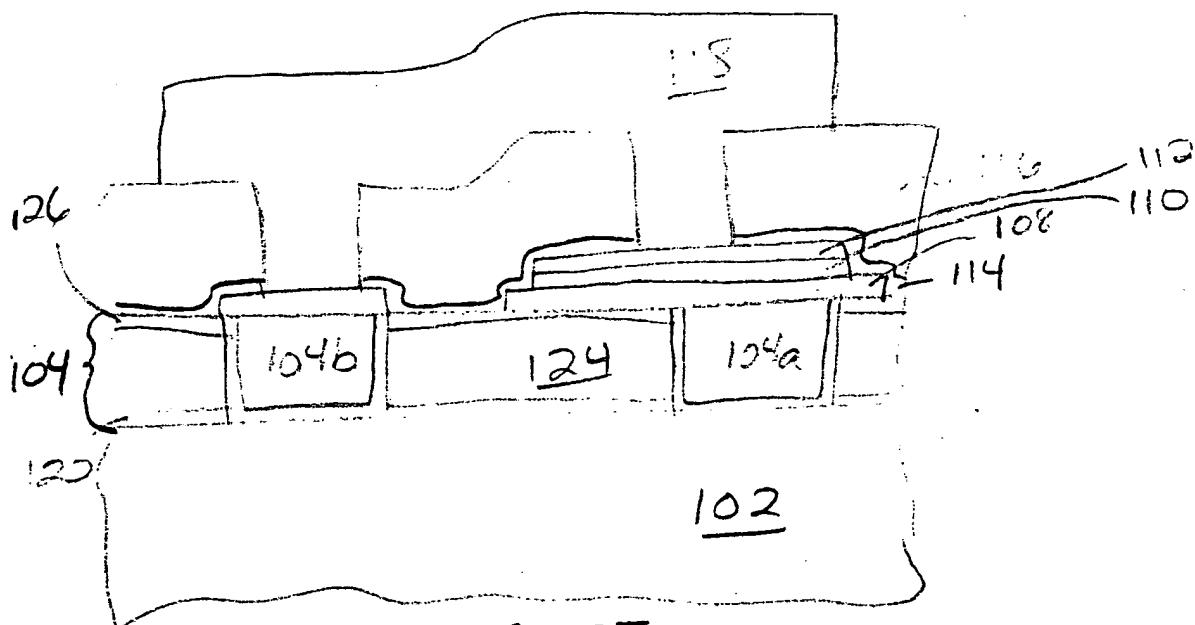


FIG. 2E

TI-350260

484

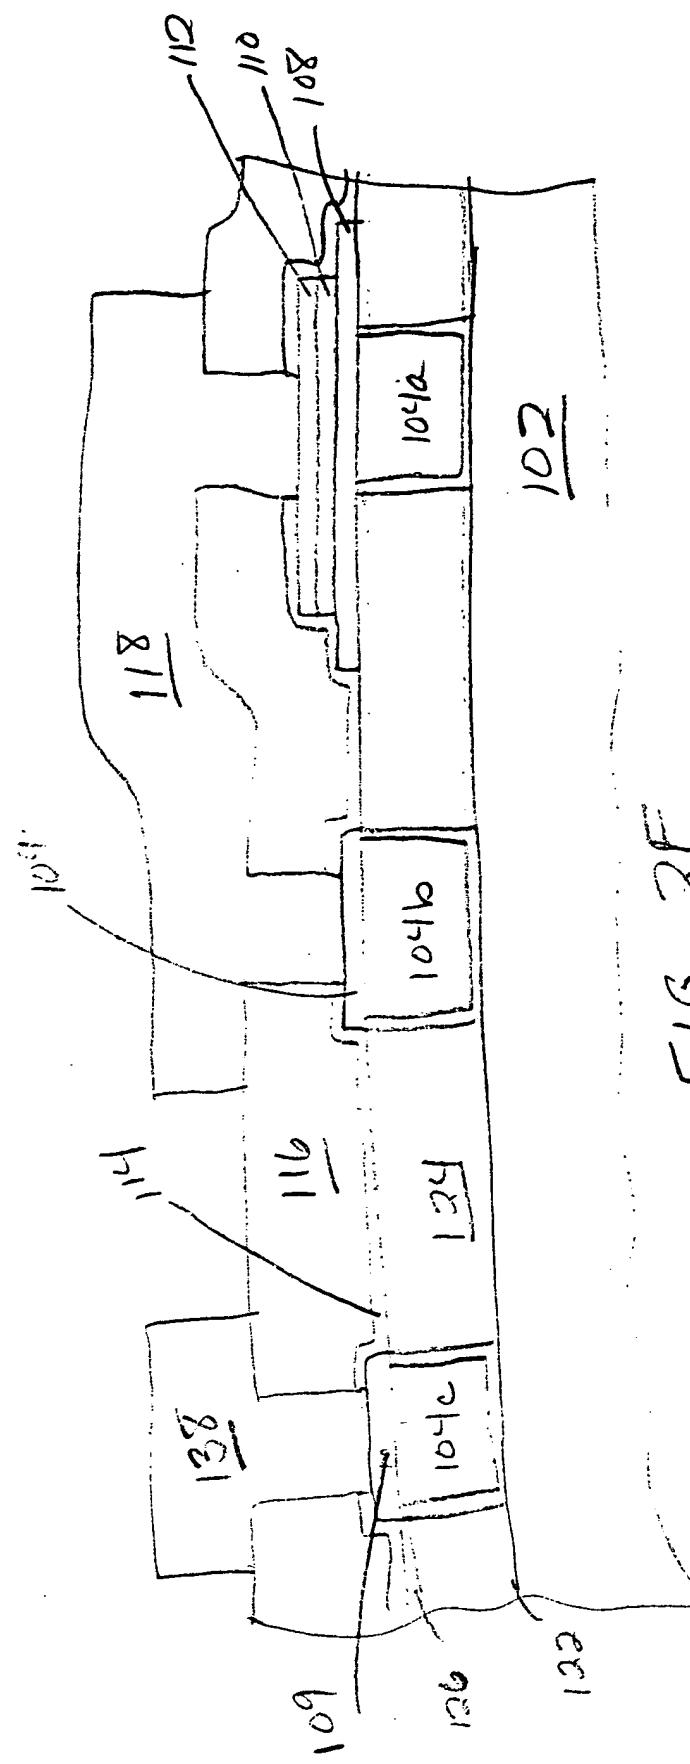


FIG. 2F